

Product Features



- Pb-Ca-Sn multi-components alloy
- High purity electrolysis lead,high density lead paste,special long effective additive
- High adsorptive performance AGM separator
- Excellent cycle life and recoverage performance from over-discharged state
- Excellent large current discharge performance, there is obvious advantage in start-up and climbing slope stage
- Good large current discharge performance, good low temperature endurance and shock endurance.
- Maintenance free, there is no need to add water during operation.

Application

- Electrical Vehicle
- Mixture Electrical vehicle
- Sightseeing car
- Golf car
- Electrical transit car
- Electrical patrol car
- Public project car
- Electrical tractor
- Property maintenance car
- Electrical flat car
- Electrical freight car
- Electrical drone car

Compliant Standards

- ☒ GB/T 18332.1-2009
- ☒ IEC 61982-3 2001-06
- ☒ GB/T 7403.1-2008
- ☒ GB/T 23636-2009
- ☒ GB/T 18332.1-2009
- ☒ Passed ISO9001:2000 、 ISO14001 、 OHSAS18001、 UL、 CE certificate

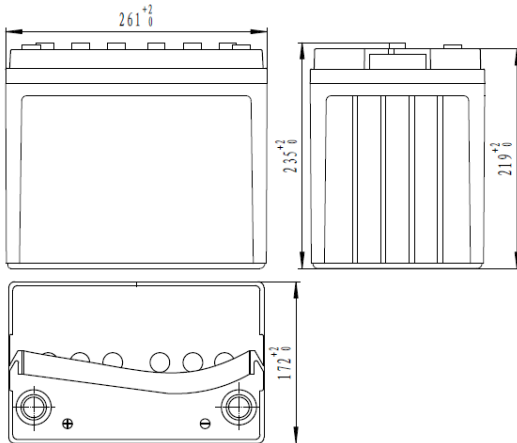

Battery Model	6-DMJ-65			
Designed Life	900 times (80%DOD)			
Capacity(25℃)	20HR(3.9A,1.75V)	10HR(7.2A,1.75V)	5HR(13A,1.75V)	1HR(48.7A,1.75V)
	78Ah	72AH	65AH	48.7AH
Dimensions	Length	Width	Height	Total Height
	261mm	172mm	219mm	235mm
Approx. Weight	24.5kg			
Internal Resistance	8.0m Ω			
Maximum Discharge Current	540A(10 Sec.)			
Self Discharge	≤2% per months (25℃)			
Charge Voltage(25℃)	Cycle use		Float use	
	14.7V(-18mV/℃), max charge current:10A		14.1V(-18mV/℃)	

Discharge parameter:

Constant current discharge data (25°C , A)											
End voltage (V/cell)	10min	20min	30min	45min	60min	90min	2h	3h	5h	10h	20h
1.60	180.7	108.0	84.32	63.81	49.60	36.05	27.84	20.20	13.11	7.251	3.921
1.65	176.9	106.3	83.59	63.54	49.41	35.97	27.78	20.13	13.07	7.223	3.909
1.70	173.0	105.1	83.21	63.27	49.22	35.87	27.72	20.11	13.04	7.214	3.906
1.75	169.7	103.4	81.90	62.40	48.75	35.53	27.50	20.00	13.00	7.200	3.900

Constant power discharge data (25°C , W/cell)											
End voltage (V/cell)	10min	20min	30min	45min	60min	90min	2h	3h	5h	10h	20h
1.60	336.4	205.6	163.2	123.8	96.89	70.89	55.23	40.17	26.11	14.48	7.952
1.65	330.3	202.9	162.2	123.6	96.76	70.98	55.14	40.09	26.08	14.44	7.942
1.70	323.9	201.1	161.8	123.4	96.64	71.02	55.08	40.12	26.07	14.55	7.949
1.75	318.1	198.1	159.7	122.0	95.88	70.47	54.68	39.93	26.00	14.54	7.950

Performance Curve:

