

Product Features

- Sulfuric acid immobilized as a gel using the gaseous SiO₂ which imported from Germany as main electrolyte, The GEL state electrolyte prevents leakage and layering;
- Low resistance PVC-SiO₂ micro-porous separator ensure low internal resistance;
- Paste type, thick plate design, good corrosion resistance, long service life;
- Advanced gel technology, the battery has good charge acceptance ability and good performance in poor power supply condition.

Application


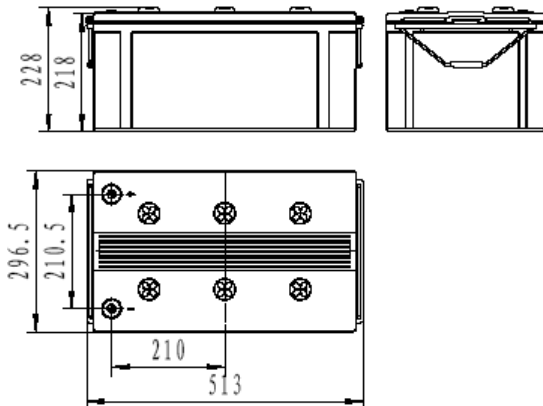
- Telecom
- Nuclear power, standby power supply
- Renewable Energy;
- CATV
- General electronic
- EPS/UPS

Compliant Standards

- IEC 60896-21/22: 2004
- IEC 61427-2005
- DIN43539-T5 1984
- YD/T1360-2005
- GB/T 22473-2008
- Passed ISO9001、ISO14001、OHSAS18001、UL and CE certificate
- Eurobat guide;

Safety

- installation compliant with:EN50272-2

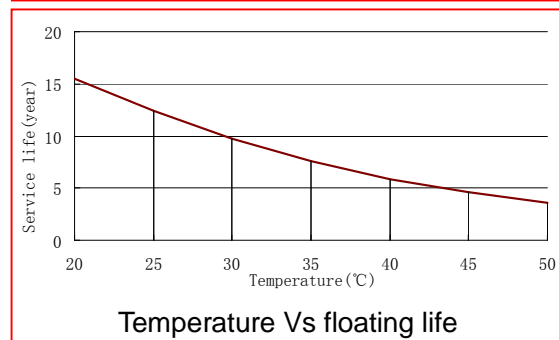
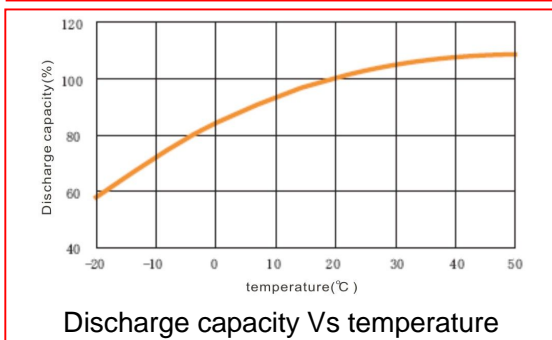
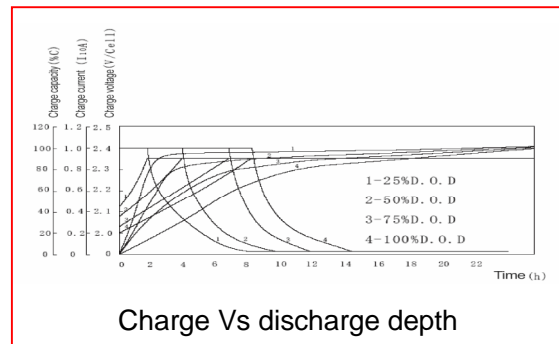
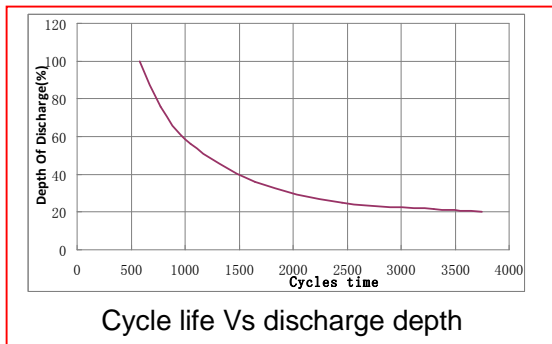


Battery Model	6GFMJ-200			
Designed Life	12 Years			
Capacity(25°C)	10HR(20A,1.80V)	5HR(34A,1.80V)	3HR(50A,1.80V)	1HR(110A,1.80V)
	200AH	170AH	150AH	110AH
Dimensions	Length	Width	Height	Total Height
	513mm	296.5mm	218mm	228mm
Approx. Weight	82.8kg			
Internal Resistance	3.2m Ω			
Max Discharge Current	1702A(3 Sec.)			
Self Discharge	≤2% per months (25°C)			
Charge Voltage(25°C)	Cycle use		Float use	
	13.98V(-21mV/°C), max charge current:40A		13.38V(-21mV/°C)	

Discharge parameter:

Constant current discharge data (25°C, A)																		
End voltage (V/cell)	5min	10 min	15 min	20 min	30 min	45 min	1h	1.5h	2h	3h	5h	10h	20h	24h	48h	100h	120h	240h
1.60	558.6	407.2	317.2	266	194.4	152.4	115.6	89.8	68.8	52.4	35	20	10.8	9.24	4.86	2.50	2.18	1.16
1.65	530	392.8	311	261.8	192.4	149.4	113.4	88.6	68.8	52.4	35	20	10.8	9.24	4.86	2.50	2.18	1.16
1.70	499.2	372.4	304.8	255.8	190.2	144.8	113.4	87.2	68.8	52.4	35	20	10.8	9.24	4.86	2.50	2.18	1.16
1.75	462.4	345.8	294.6	245.6	184.2	140.8	111.4	86	68.8	52.4	35	20	10.8	9.24	4.86	2.50	2.18	1.16
1.80	394.8	315	276.2	229.2	174	135.6	110	83.6	66.8	50	34	20	10.4	8.8	4.86	2.50	2.18	1.16

Constant power discharge data (25°C, W/cell)																		
End voltage (V/cell)	5min	10 min	15 min	20 min	30 min	45 min	1h	1.5h	2h	3h	5h	10h	20h	24h	48h	100h	120h	240h
1.60	986	738.6	579.8	486.6	364.6	274.2	213.6	166	130	94.2	64.4	38	20.4	18.30	9.72	5.00	4.40	2.34
1.65	917.2	711.4	567	480.8	361.4	271.8	209.8	164.8	130	94.2	64.4	37.6	20.4	18.30	9.72	5.00	4.40	2.34
1.70	838.6	672.2	548	471	356.4	268	209.8	163.2	130	94.2	64.4	37.6	20.4	18.30	9.72	5.00	4.40	2.34
1.75	773	623	531	453.2	347.2	261.8	206	161.6	130	94.2	64.4	37.2	20.4	18.30	9.72	5.00	4.40	2.34
1.80	719.2	568	507	424.6	330.8	252.4	203.2	157.8	126.8	91.8	61	36.2	19.84	17.60	9.72	5.00	4.40	2.34

Performance Curve:


Address: NO.1 Shengyang Road, Qufu, Shandong 273100 China

Tel: +86-537-4438666-6028

Fax: +86-537-4411936

E-mail: sales@sacredsun.cn

http://www.sacredsun.com