

Product Features

- Sulfuric acid immobilized as a gel using the gaseous SiO₂ which imported from Germany as main electrolyte, The GEL state electrolyte prevents leakage and layering;
- Low resistance PVC-SiO₂ micro-porous separator ensure low internal resistance;
- Paste type, thick plate design, good corrosion resistance, long service life;
- Advanced gel technology, the battery has good charge acceptance ability and good performance in poor power supply condition.

Application


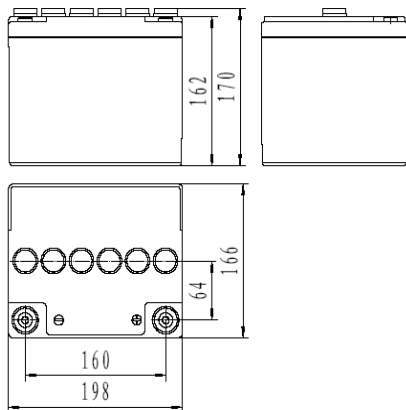
- Telecom
- Nuclear power, standby power supply
- Renewable Energy;
- CATV
- General electronic
- EPS/UPS

Compliant Standards

- IEC 60896-21/22: 2004
- IEC 61427-2005
- DIN43539-T5 1984
- YD/T1360-2005
- GB/T 22473-2008
- Passed ISO9001、ISO14001、OHSAS18001、UL and CE certificate
- Eurobat guide;

Safety

- installation compliant with:EN50272-2

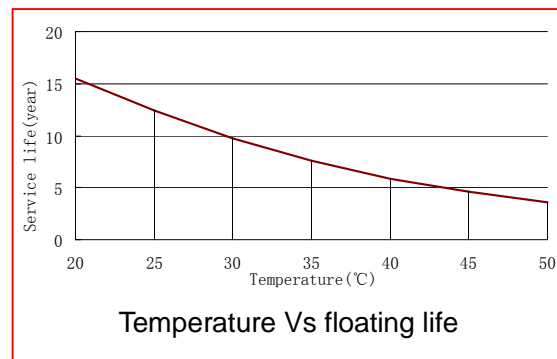
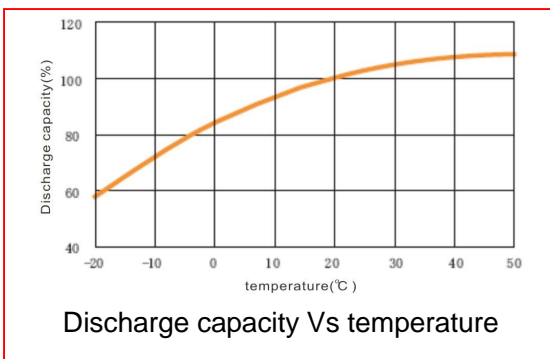
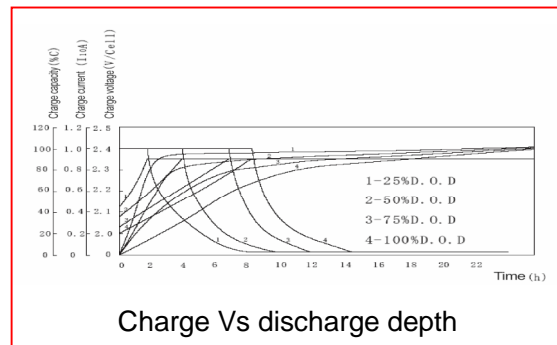
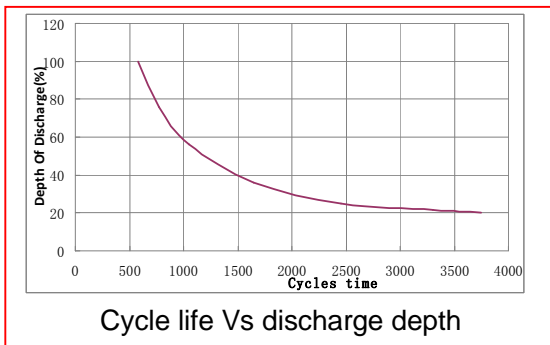


Battery Model	6GFMJ-33			
Designed Life	12 Years			
Capacity(25°C)	10HR(3.3A,1.80V)	5HR(5.6A,1.80V)	3HR(8.3A,1.80V)	1HR(18.2A,1.80V)
	33AH	28AH	24.9AH	18.2AH
Dimensions	Length	Width	Height	Total Height
	198mm	166mm	162mm	170mm
Approx. Weight	14kg			
Internal Resistance	8.5mΩ			
Max Discharge Current	506A(3 Sec.)			
Self Discharge	≤2% per months (25°C)			
Charge Voltage(25°C)	Cycle use		Float use	
	13.98V(-21mV/°C), max charge current:6.6A		13.38V(-21mV/°C)	

Discharge parameter:

Constant current discharge data (25°C, A)																		
End voltage (V/cell)	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	5h	10h	20h	24h	48h	100h	120h	240h
1.60	92.2	67.2	52.3	43.9	32.1	25.1	19.1	14.8	11.4	8.6	5.8	3.3	1.78	1.52	0.80	0.41	0.36	0.19
1.65	87.5	64.8	51.3	43.2	31.7	24.7	18.7	14.6	11.4	8.6	5.8	3.3	1.78	1.52	0.80	0.41	0.36	0.19
1.70	82.4	61.4	50.3	42.2	31.4	23.9	18.7	14.4	11.4	8.6	5.8	3.3	1.78	1.52	0.80	0.41	0.36	0.19
1.75	76.3	57.1	48.6	40.5	30.4	23.2	18.4	14.2	11.4	8.6	5.8	3.3	1.78	1.52	0.80	0.41	0.36	0.19
1.80	65.1	52.0	45.6	37.8	28.7	22.4	18.2	13.8	11.0	8.3	5.6	3.3	1.72	1.45	0.80	0.41	0.36	0.19

Constant power discharge data (25°C, W/cell)																		
End voltage (V/cell)	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	5h	10h	20h	24h	48h	100h	120h	240h
1.60	162.7	121.9	95.7	80.3	60.2	45.2	35.2	27.4	21.5	15.5	10.6	6.3	3.4	3.02	1.60	0.83	0.73	0.39
1.65	151.3	117.4	93.6	79.3	59.6	44.8	34.6	27.2	21.5	15.5	10.6	6.2	3.4	3.02	1.60	0.83	0.73	0.39
1.70	138.4	110.9	90.4	77.7	58.8	44.2	34.6	26.9	21.5	15.5	10.6	6.2	3.4	3.02	1.60	0.83	0.73	0.39
1.75	127.5	102.8	87.6	74.8	57.3	43.2	34.0	26.7	21.5	15.5	10.6	6.1	3.4	3.02	1.60	0.83	0.73	0.39
1.80	118.7	93.7	83.7	70.1	54.6	41.6	33.5	26.0	20.9	15.1	10.1	6.0	3.3	2.90	1.60	0.83	0.73	0.39

Performance Curve:


Address: NO.1 Shengyang Road, Qufu, Shandong 273100 China

Tel: +86-537-4438666-6028

Fax: +86-537-4411936

E-mail: sales@sacredsun.cn

<http://www.sacredsun.com>