

### Product Features



- High tin low calcium alloy grids designed to resist corrosion;
- Patent multi-layer polarity sealing structure, safety and reliable leakage-proof performance;
- Patent composite grid structure and plate of high humidity and high temperature curing process which prolong life;
- High purity raw and auxiliary materials, low self discharge.

### Application

- UPS/EPS
- Emergency lighting
- Communication equipment;
- Renewable Energy
- Power tool
- Universal

### Compliant Standards

- GB/T 19639.1-2005;
- IEC 61056-1/2: 2002
- JIS C8702-1/2: 2009;
- Passed ISO9001、ISO14001、OHSAS18001、UL and CE certificates

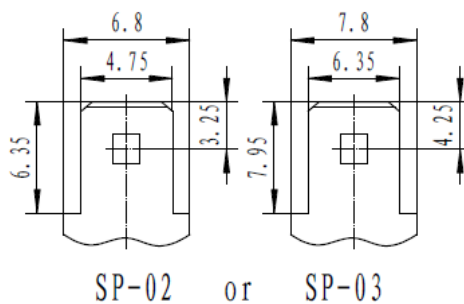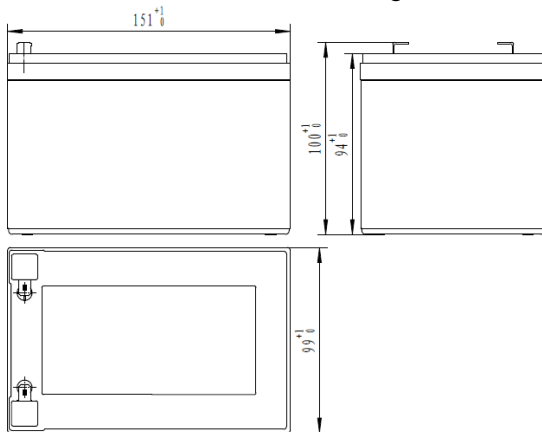

Battery Model	SSP12-12			
Designed Life	5 Years			
Capacity(25°C)	20HR(0.6A,1.75V)	10HR(1.1A,1.75V)	5HR(1.92A,1.75V)	1HR(7.4A,1.70V)
	12Ah	11AH	9.6AH	7.4AH
Dimensions	Length	Width	Height	Total Height
	151mm	99mm	94mm	100mm
Approx. Weight	3.6kg			
Internal Resistance	21m Ω			
Maximum Discharge Current	180A(5 Sec.)			
Self Discharge	≤3% per months (25°C)			
Charge Voltage(25°C)	Cycle use		Float use	
	14.7V(-18mV/°C), max charge current:3.6A		13.62V(-18mV/°C)	

### Discharge parameter:





Constant current discharge data (25°C, A)													
End voltage (V/cell)	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	5h	10h	20h
1.60	45.71	29.03	22.06	17.42	13.01	9.724	7.673	5.491	4.248	2.993	1.970	1.125	0.612
1.65	44.34	28.36	21.59	17.09	12.79	9.568	7.571	5.423	4.198	2.955	1.953	1.115	0.607
1.70	43.02	27.82	21.29	16.85	12.61	9.448	7.490	5.370	4.157	2.929	1.937	1.109	0.604
1.75	39.00	25.90	20.16	16.17	12.20	9.200	7.329	5.280	4.100	2.900	1.920	1.100	0.600
1.80	34.79	23.70	18.81	15.31	11.71	8.896	7.160	5.190	4.043	2.865	1.899	1.090	0.596

Constant power discharge data (25°C, W/cell)													
End voltage (V/cell)	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	5h	10h	20h
1.60	83.57	54.50	41.90	33.39	25.16	18.96	15.05	10.81	8.390	5.933	3.917	2.243	1.223
1.65	81.30	53.42	41.13	32.86	24.80	18.71	14.89	10.71	8.311	5.871	3.890	2.228	1.215
1.70	79.15	52.58	40.70	32.49	24.54	18.52	14.76	10.63	8.252	5.832	3.868	2.219	1.211
1.75	72.22	49.10	38.66	31.30	23.82	18.10	14.47	10.47	8.155	5.785	3.842	2.206	1.205
1.80	64.76	45.07	36.25	29.79	22.94	17.53	14.19	10.32	8.061	5.725	3.807	2.190	1.200

All data on the spec. sheet is an average value:

The tolerance range:  $X < 6\text{min}$ (+15%~-15%),  $6\text{min} \leq X < 10\text{min}$ (+12%~-12%),  $10\text{min} \leq X < 60\text{min}$ (+8%~-8%),  $X \geq 60\text{min}$ (+5%~-5%)

### Performance Curve:

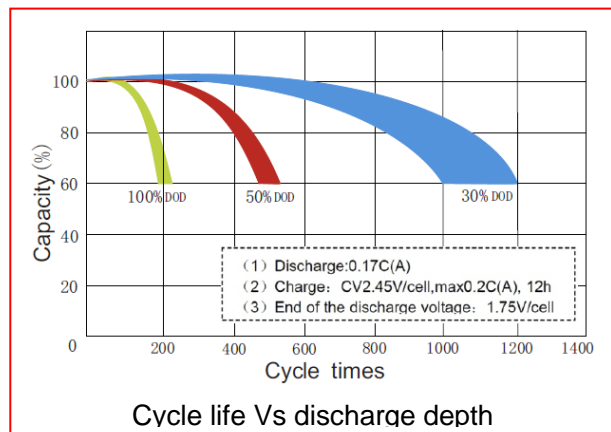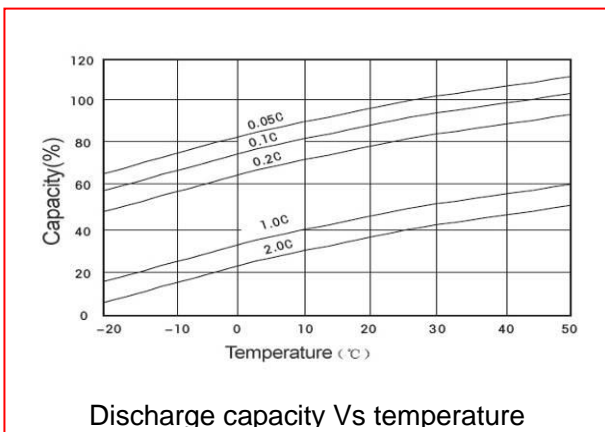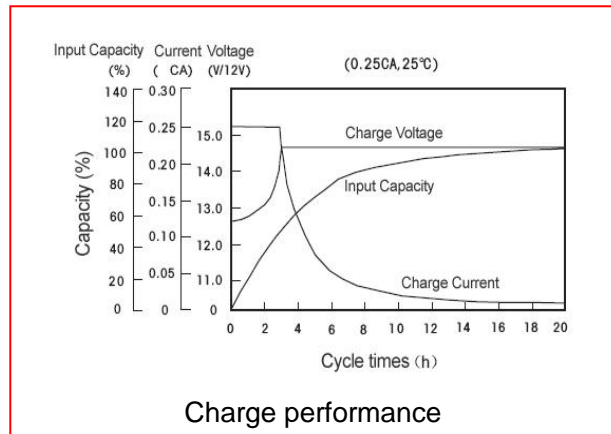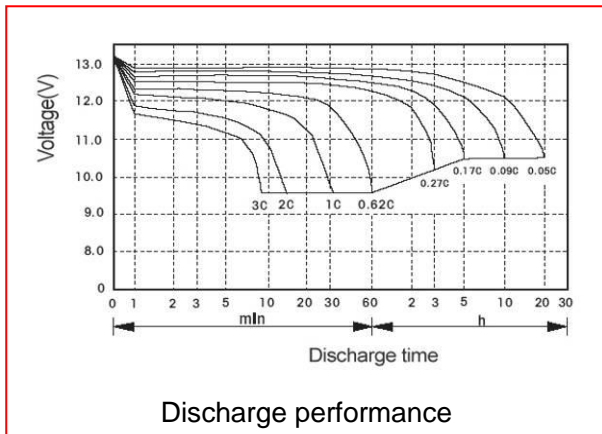

Address: NO.1 Shengyang Road, Qufu, Shandong 273100 China

Tel: +86-537-4438666-6028

Fax: +86-537-4411936

E-mail: sales@sacredsun.cn

http://www.sacredsun.com